

NON-CLOG PUMPS


VARIABLE USE, VACUUM-ASSISTED

DESIGNED FOR A VARIETY OF APPLICATIONS – SEWAGE BYPASS, WELLPOINT, AND SUMPING.

- > Available with vacuum assist primed, compressor primed, or diaphragm primed pump
- > Capable of 24' suction lift or greater and up to 12,800 GPM
- > Operates efficiently under continuous or intermittent flow conditions
- > Large clean outs on suction & discharge
- > Over-sized air separation chamber with stainless steel float strips high volumes of light gases and air for fast priming
- > Integral fuel tank designed for up to 24-hour operation on some models



- > FULLY AUTOMATIC, DRY-PRIMING
- > NON-CLOG IMPELLER
- > PORTABLE & SELF-CONTAINED
- > PATENTED MECHANICAL SEAL
- > TRAILER MOUNTED VERSION *
- > DIESEL OR ELECTRIC OPTIONS

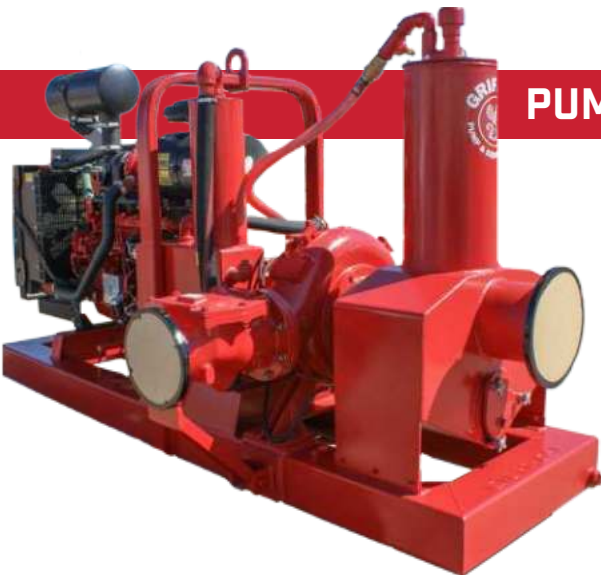

PUMP MODEL OPTIONS

	MAX CAPACITY (GPM)	MAX HEAD (FT.)	SOLIDS HANDLING
4" 4NCRD	1,150	95'	3"
6" 6NCRD-9.25"	2,200	80'	3"
6" 6NHRD-11"	3,600	160'	3"
8" 8NHRD-8NNT	4,400	230'	3"
12" 12NCRD-12NNT	5,900	175'	4.25"
18" 18NCRD	12,800	125'	4.5"

* Trailer mounted version available on some models.

Pump models and specifications are subject to change without notice. Contact Griffin for specific pump models.

CONTACT THE DEWATERING
EXPERTS FOR PUMP INFORMATION



GRIFFINDEWATERING.COM
1-800-431-1510